



HDL-028 Head lamp

FEATURES

- Performance cut-off line meets regulation requirement
- Can be mounted from the back or from the bottom
- Illuminated LOGO or printed LOGO is available
- Heated lens is available



Working Lamp / Head Lamp

Function	Power	Voltage	Material	Mounting	Connection	Sealing
High Beam	Theoretical: 1LED*15W Actual: 15.6 W	DC 12/24V	Housing: ADC12 Lens:PC	Bolt	300mm Cable	Potting
Low Beam	Theoretical: 1LED*15W Actual: 14.5 W					
Heated Lens(Optional)	32.5W					




HDL-028 Head lamp



ECE LHT

Beam pattern:Low beam


Illuminance (LUX)

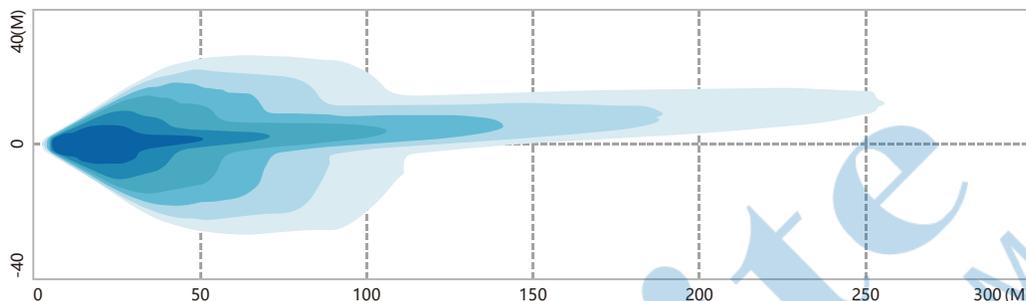

ECE RHT

Beam pattern:Low beam


Illuminance (LUX)

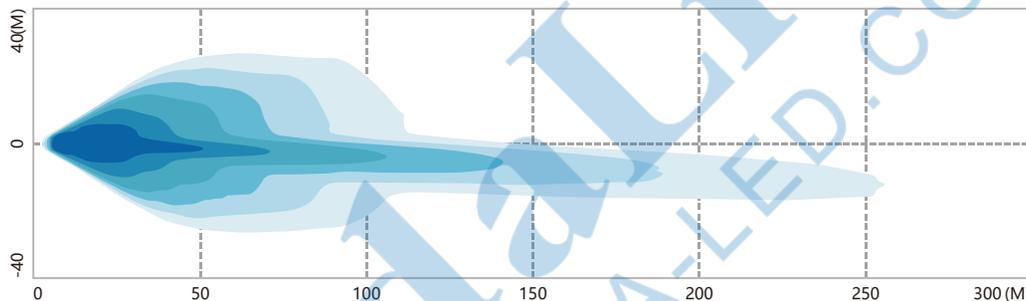

DOT

Beam pattern:Low beam


Illuminance (LUX)

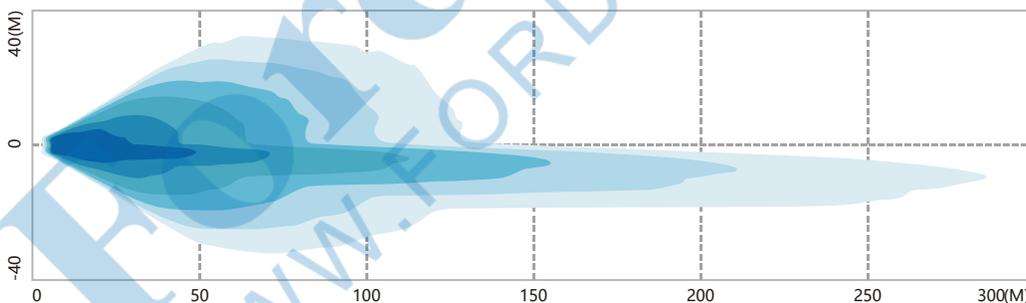

DOT/ECE

Beam pattern:High beam

Illuminance (LUX)

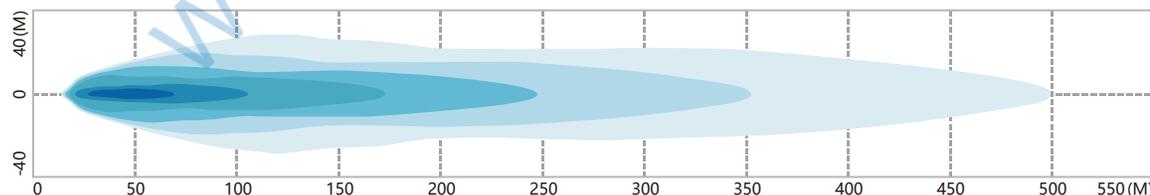

Working Lamp / Head Lamp