



**JGP-903C3W**

**QDP-903C3W**

**DESCRIPTION**

Low Current Consumption;  
Connection form: Cable Length, L = 550 mm  
Lens material: PC, UV curing  
Garland: ABS, chrome plated, AL die cast housing.

**VOLTAGE**

10-30V

**POWER CONSUMPTION**

Spot/Driving Beam: 60W; Front Position: 2.4W;

**MOUNT**

Bracket installation

**LENS COLOUR**

Clear

**WARRANTY**

3 years

**WATERPROOF**

IP 67

**OPERATING TEMPERATURE**

-40°C to +65°C

**CABLE LENGTH**

0.55M

**PACKAGING**

Net Weight: 2.29KG Innerbox: 255\*232\*80mm  
Outer Packing Carton: 480\*280\*265mm Packing Qty: 6PCS/CTN

**903 Auxilliary Lighting**




**JGP-903C3W**



**QDP-903C3W**

PART NUMBER	FUNCTION	APPROVALS	LEDs	POWER
JGP-903C3W	Spot Beam Front Position	ECE R112/R7/R10	6PCS 10W SMD White LED 12PCS 0.2W SMD White LED	S/D Beam: 60 W; FrP: 2.4W
QDP-903C3W	Driving Beam Front Position		6PCS 10W SMD White LED 12PCS 0.2W SMD White LED	

**JGP-903**

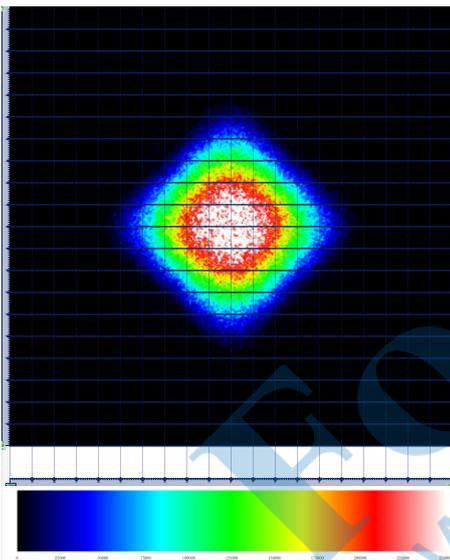

**QDP-903**

