



12-30C2A-M22

DESCRIPTION

WA-538 LED BEACON

- 24 PCS SMD LED
- Low Current Draw Consumption
- PC Lens with Smooth Exterior Will Not Gather Dirt and Dust
- Uniform 360 Degree Light Distribution---No Dark Spots
- Low-Profile.

VOLTAGE 10-30V

POWER CONSUMPTION 8 W

MOUNT M22 Single Bolt

APPROVALS SAE J845 CLASS 3

FLASH PATTERN ON TIME:0.13S OFF TIME:0.27S

LENS COLOR Clear and Color

WARRANTY 3 Years

WATERPROOF IP 67


OPERATING TEMPERATURE -40° C to +65° C

PACKAGING

Net Weight:0.185KG Innerbox:102*82*115mm
Outer Packing Carton:538*433*252mm Packing Qty:50PCS/CTN



PART NUMBER	LED COLOUR	MOUNT	VOLTAGE	LEDs	OUTER LENS COLOR
12-30C2A-M22		M22 Single Bolt	10-80V	24 PCS 0.2W SMD Amber	Clear or Color
12-30C2B-M22				24 PCS 0.2W SMD Blue	
12-30C2R-M22				24 PCS 0.2W SMD Red	
12-30C2W-M22				24 PCS 0.2W SMD White	

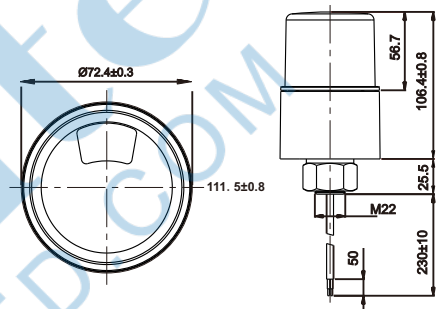

12-30C2A-ST

DESCRIPTION

WA-539 LED BEACON

- 24 PCS SMD LED
- Low Current Draw Consumption
- PC Lens with Smooth Exterior Will Not Gather Dirt and Dust
- Uniform 360 Degree Light Distribution---No Dark Spots
- Low-Profile.

VOLTAGE 10-30V

POWER CONSUMPTION 8 W

MOUNT ST 5

APPROVALS SAE J845 CLASS 3

FLASH PATTERN ON TIME:0.13S OFF TIME:0.27S

LENS COLOR Clear and Color

WARRANTY 3 Years

WATERPROOF Ip67

OPERATING TEMPERATURE -40° C to +65° C

PACKAGING

Net Weight:0.185KG Innerbox:102*82*115mm
Outer Packing Carton:538*433*252mm Packing Qty:50PCS/CTN



PART NUMBER	LED COLOUR	MOUNT	VOLTAGE	LEDs	OUTER LENS COLOR
12-30C2A-ST		2 PCS ST5	10-80V	24 PCS 0.2W SMD Amber	Clear or Color
12-30C2B-ST				24 PCS 0.2W SMD Blue	
12-30C2R-ST				24 PCS 0.2W SMD Red	
12-30C2W-ST				24 PCS 0.2W SMD White	

