

**12-R9C2A-E1**  
**12-R9C2A-S1**

**Light Bar**

**DESCRIPTION**

Low Current Consumption;  
Leds: 68 PCS SMD AMBER LED;  
Power: 52 W  
12/24V

**VOLTAGE**

**MOUNT**

**APPROVALS**

**WARRANTY**

**LENS COLOR**

**WATERPROOF**

**OPERATING TEMPERATURE**

**CABLE LENGTH**

**PACKAGING**

Bracket installation

ECE R65/R10(EMC)/SAE J845;

3 years

Transparent or color

IP 67

-40°C to +65°C

2.5m



Valve bag: 120\*80mm Bubble pack: 220\*400mm  
A set of carton: 660\*335\*108 mm Packing Qty:1PCS/CTN



**FLASH PATTERNS**

|   |                                  |    |                                   |
|---|----------------------------------|----|-----------------------------------|
| 1 | Triple(Left-Right split)         | 2  | Triple(Rear-side-Front)           |
| 3 | Single(ECE):146                  | 4  | Combine(1-3)                      |
| 5 | Single-Triple                    | 6  | Single-Triple-Quint               |
| 7 | H/L Split(Left-Right)-Quad(Full) | 8  | H/L Split(Full)-Split(Left-Right) |
| 9 | Quint                            | 10 | Split(Left-Right)-Quint           |

| PART NUMBER | APPROVALS        | LEDs                | POWER |
|-------------|------------------|---------------------|-------|
| 12-R9C2A-E1 | ECE R65/R10(EMC) | 68PCS SMD AMBER LED | 52W   |
| 12-R9C2A-S1 | SAE J845         | 68PCS SMD AMBER LED | 52W   |

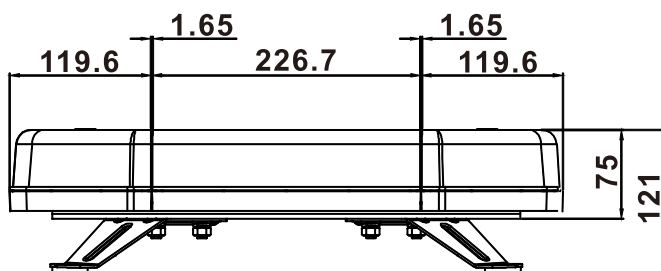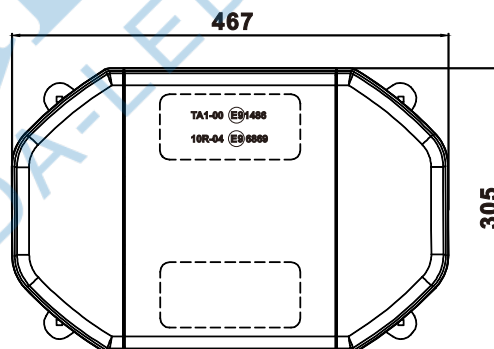



**12-R9C2A-E2**

**12-R9C2A-S2**

## Light Bar

### DESCRIPTION

Low Current Consumption;  
Leds: 100 PCS SMD AMBER LED;  
Power: 79 W;  
Rigged solid state LEDs can withstand shock.  
12/24V

### VOLTAGE

### MOUNT

### APPROVALS

### WARRANTY

### LENS COLOR

### WATERPROOF

### OPERATING TEMPERATURE

### CABLE LENGTH

### PACKAGING

Bracket installation  
ECE R65/R10(EMC)/SAE J845;  
3 years  
Transparent or color

IP 67  
-40°C to +65°C  
2.5m



Valve bag: 120\*80mm Bubble pack: 220\*400mm  
A set of carton: 660\*335\*108 mm Packing Qty:1PCS/CTN



### FLASH PATTERNS

|   |                                  |    |                                   |
|---|----------------------------------|----|-----------------------------------|
| 1 | Triple(Left-Right split)         | 2  | Triple(Rear-side-Front)           |
| 3 | Single(ECE):146                  | 4  | Combine(1-3)                      |
| 5 | Single-Triple                    | 6  | Single-Triple-Quint               |
| 7 | H/L Split(Left-Right)-Quad(Full) | 8  | H/L Split(Full)-Split(Left-Right) |
| 9 | Quint                            | 10 | Split(Left-Right)-Quint           |

| PART NUMBER | APPROVALS        | LEDs                  | POWER |
|-------------|------------------|-----------------------|-------|
| 12-R9C2A-E2 | ECE R65/R10(EMC) | 100 PCS SMD AMBER LED | 79W   |
| 12-R9C2A-S2 | SAE J845         | 100 PCS SMD AMBER LED | 79W   |

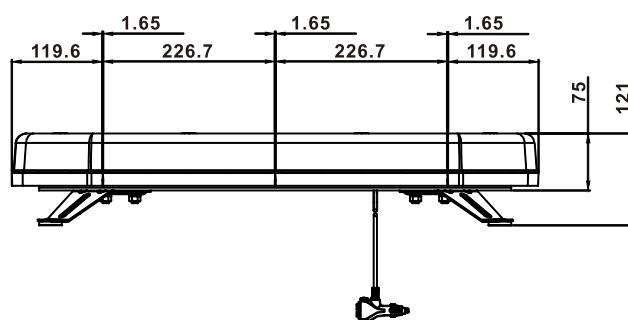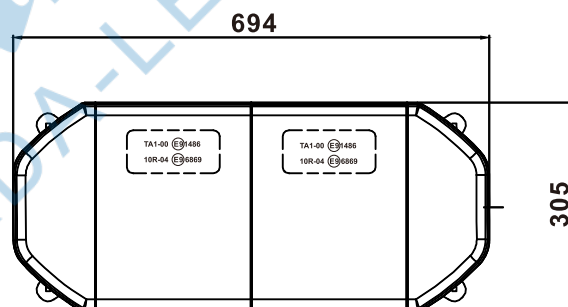



**12-R9C2A-E3**  
**12-R9C2A-S3**

**Light Bar**

**DESCRIPTION**

Low Current Consumption;  
Leds: 132 PCS SMD AMBER LED;  
Power: 109 W  
12/24V

**VOLTAGE**

**MOUNT**

Bracket installation

**APPROVALS**

ECE R65/R10(EMC)/SAE J845;

**WARRANTY**

3 years

**LENS COLOR**

Transparent or color

**WATERPROOF**

IP 67

**OPERATING TEMPERATURE**

-40°C to +65°C

**CABLE LENGTH**

2.5m

**PACKAGING**

Valve bag: 120\*80mm Bubble pack: 220\*400mm  
A set of carton: 1113\*335\*108 mm Packing Qty: 1PCS/CTN



Select Flash Patten



ON/OFF

**FLASH PATTERNS**

|   |                                  |    |                                   |
|---|----------------------------------|----|-----------------------------------|
| 1 | Triple(Left-Right split)         | 2  | Triple(Rear-side-Front)           |
| 3 | Single(ECE):146                  | 4  | Combine(1-3)                      |
| 5 | Single-Triple                    | 6  | Single-Triple-Quint               |
| 7 | H/L Split(Left-Right)-Quad(Full) | 8  | H/L Split(Full)-Split(Left-Right) |
| 9 | Quint                            | 10 | Split(Left-Right)-Quint           |

| PART NUMBER | APPROVALS        | LEDs                  | POWER |
|-------------|------------------|-----------------------|-------|
| 12-R9C2A-E3 | ECE R65/R10(EMC) | 132 PCS SMD AMBER LED | 109W  |
| 12-R9C2A-S3 | SAE J845         | 132 PCS SMD AMBER LED | 109W  |

EMERGENCY LIGHTS

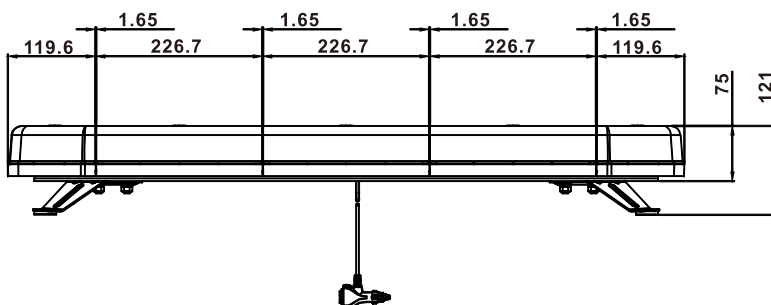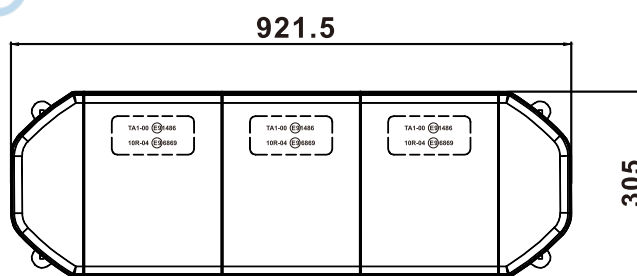

**12-R9C2A-E4**  
**12-R9C2A-S4**

**Light Bar**

**DESCRIPTION**

Low Current Consumption;  
Leds: 164 PCS SMD AMBER LED;  
Power: 127 W;  
Rigged solid state LEDs can withstand shock.

**VOLTAGE**

12/24V

**MOUNT**

Bracket installation

**APPROVALS**

ECE R65/R10(EMC)/SAE J845;

**WARRANTY**

3 years

**LENS COLOR**

Transparent or color

**WATERPROOF**

IP 67

**OPERATING TEMPERATURE**

-40°C to +65°C

**CABLE LENGTH**

2.5m

**PACKAGING**

Valve bag: 120\*80mm Bubble pack: 220\*400mm  
A set of carton: 1340\*335\*108 mm Packing Qty: 1PCS/CTN





**FLASH PATTERNS**

|   |                                  |    |                                   |
|---|----------------------------------|----|-----------------------------------|
| 1 | Triple(Left-Right split)         | 2  | Triple(Rear-side-Front)           |
| 3 | Single(ECE):146                  | 4  | Combine(1-3)                      |
| 5 | Single-Triple                    | 6  | Single-Triple-Quint               |
| 7 | H/L Split(Left-Right)-Quad(Full) | 8  | H/L Split(Full)-Split(Left-Right) |
| 9 | Quint                            | 10 | Split(Left-Right)-Quint           |

| PART NUMBER | APPROVALS        | LEDs                  | POWER |
|-------------|------------------|-----------------------|-------|
| 12-R9C2A-E4 | ECE R65/R10(EMC) | 164 PCS SMD AMBER LED | 127W  |
| 12-R9C2A-S4 | SAE J845         | 164 PCS SMD AMBER LED | 127W  |

1148.8

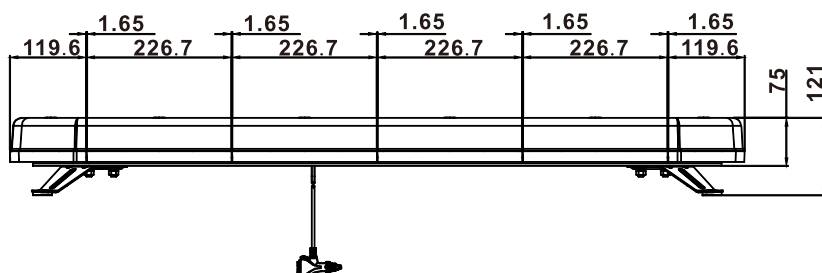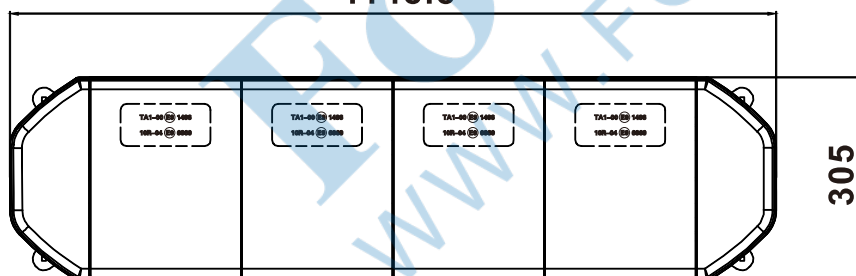



**12-R9C2A-E5**  
**12-R9C2A-S5**

**Light Bar**

**DESCRIPTION**

Low Current Consumption;  
Leds: 196 PCS SMD AMBER LED;  
Power: 140 W

**VOLTAGE**

12/24V

**MOUNT**

Bracket installation

**APPROVALS**

ECE R65/R10(EMC)/SAE J845;

**WARRANTY**

3 years

**LENS COLOR**

Transparent or color

**WATERPROOF**

IP 67

**OPERATING TEMPERATURE**

-40°C to +65°C

**CABLE LENGTH**

2.5m

**PACKAGING**

Valve bag: 120\*80mm Bubble pack: 220\*400mm  
A set of carton: mm Packing Qty: 1PCS/CTN





**FLASH PATTERNS**

|   |                                  |    |                                   |
|---|----------------------------------|----|-----------------------------------|
| 1 | Triple(Left-Right split)         | 2  | Triple(Rear-side-Front)           |
| 3 | Single(ECE):146                  | 4  | Combine(1-3)                      |
| 5 | Single-Triple                    | 6  | Single-Triple-Quint               |
| 7 | H/L Split(Left-Right)-Quad(Full) | 8  | H/L Split(Full)-Split(Left-Right) |
| 9 | Quint                            | 10 | Split(Left-Right)-Quint           |

| PART NUMBER | APPROVALS        | LEDs                  | POWER |
|-------------|------------------|-----------------------|-------|
| 12-R9C2A-E5 | ECE R65/R10(EMC) | 196 PCS SMD AMBER LED | 140W  |
| 12-R9C2A-S5 | SAE J845         | 196 PCS SMD AMBER LED | 140W  |

Select Flash Patten

ON/OFF

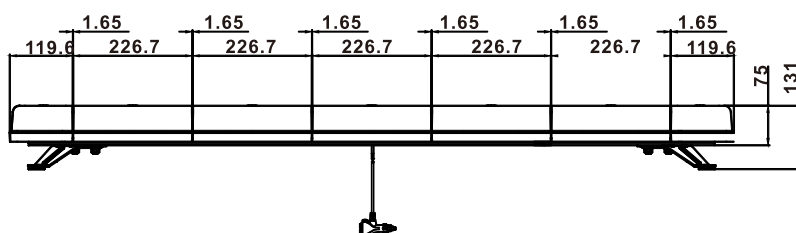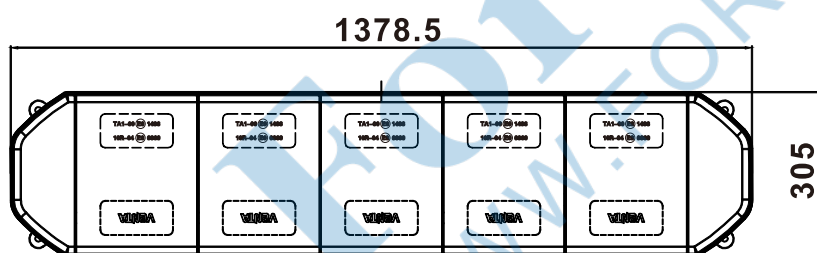

EMERGENCY LIGHTS

