DI-011C2A — DI-011 Indicator Lamp

Voltage	10-30V
Function	Indicator
Wattage	DI:3.7W
Mount	Rubber ring mount (Not Included)
Connect	18# wire L=300MM
Approval	DI:R6 EMC:R10
Sealing	Ultrasonic welding
Waterproof	IP67
Lens	PC
Housing	PC,white
Package	inner box：120*55*120mm Carton：625*300*260mm QTY：50PCS

Size

35

Ø109

300^{+30}_{-15}
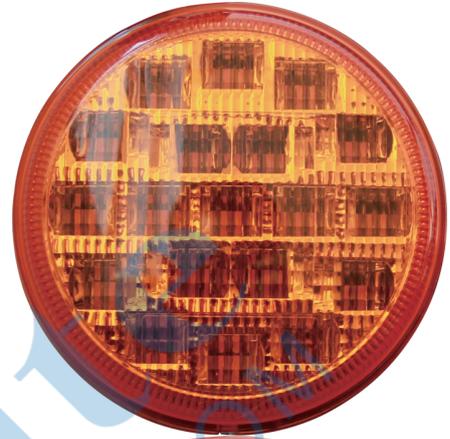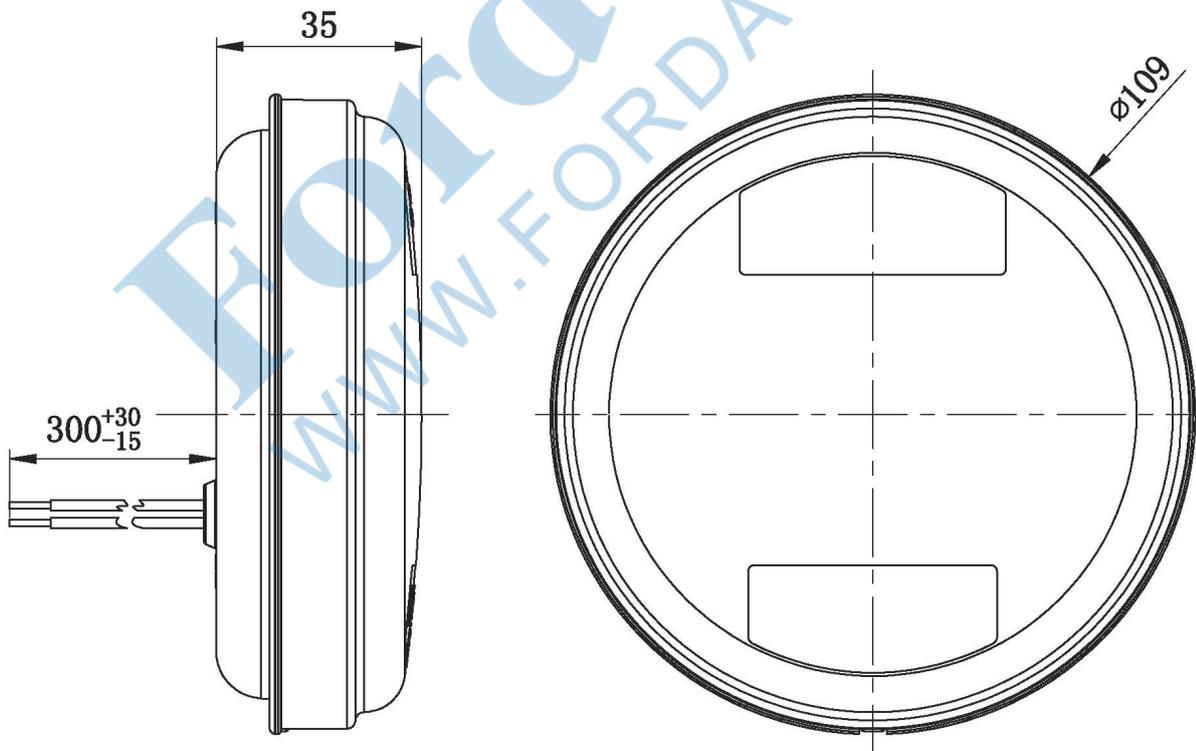
REV-011C2A

REV-011 Reverse Lamp

Voltage	10-30V
Function	Reverse
Wattage	Reverse: 2.8W
Mount	Rubber ring mount (Not Included)
Connect	18# wire L=300MM
Approval	Reverse:R23 EMC:R10
Sealing	Ultrasonic welding
Waterproof	IP67
Lens	PC
Housing	PC,white
Package	inner box： 120*55*120mm Carton： 625*300*260mm QTY： 50PCS

Size

35

300 +30 −15

Ø109
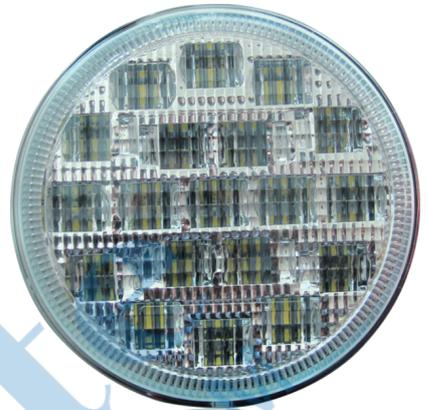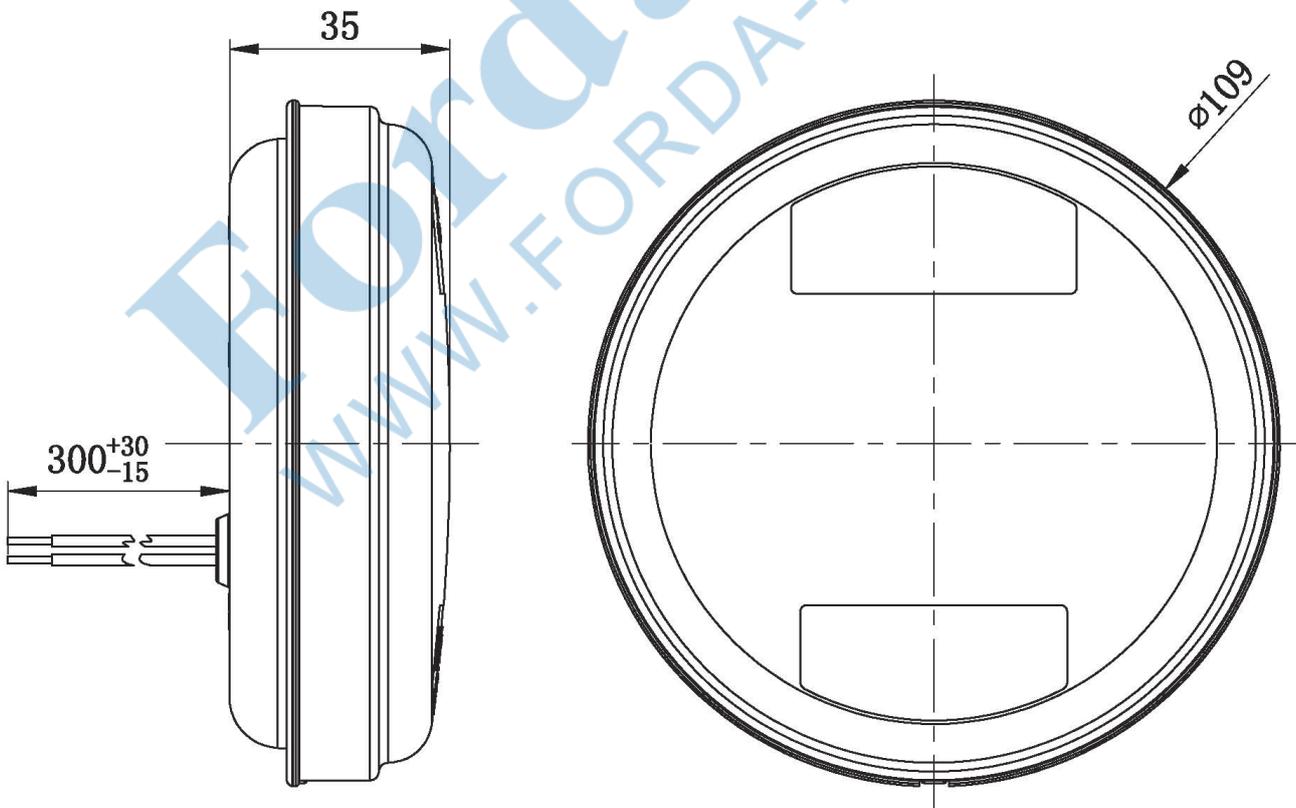
STT-011C2R

STT-011 Stop/Tail Lamp

Voltage	10-30V
Function	Stop/Tail
Wattage	Tail:0.4W,Stop:2.9W,
Mount	Rubber ring mount (Not Included)
Connect	18# wire L=300MM
Approval	ECE： Tail:R7 Stop:R7; EMC:R10
Sealing	Ultrasonic welding
Waterproof	IP67
Lens	PC
Housing	PC,white
Package	inner box： 120*55*120mm Carton： 625*300*260mm ATY： 50PCS

Size

35

Ø109

300⁺³⁰₋₁₅
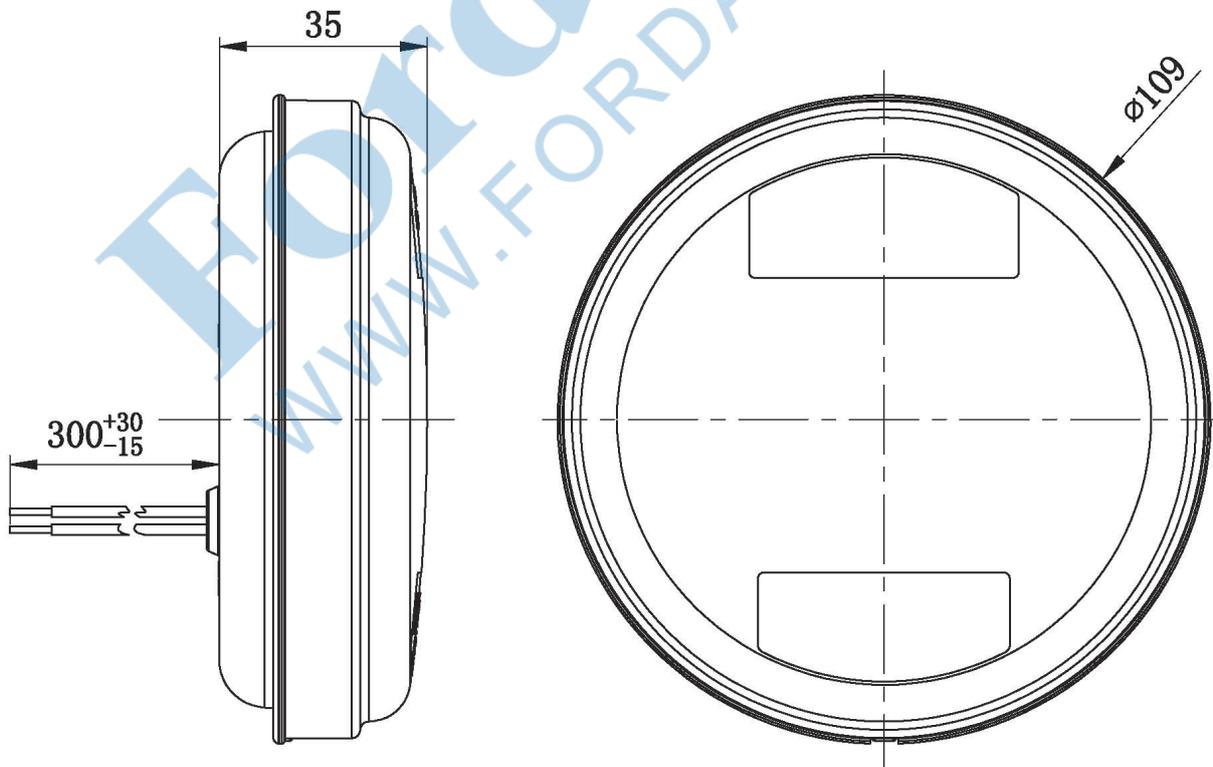
STTD-011C2AR

STTD-011 Stop/Tail/DI Lamp

Voltage	10-30V
Function	Stop/Tail/DI
Wattage	Tail:0.4W,Stop:1.9W,DI:2.4W
Mount	Rubber ring mount (Not Included)
Connect	18# wire L=300MM
Approval	ECE：Tail:R7,Stop:R7; DI:R6,EMC:R10
Sealing	Ultrasonic welding
Waterproof	IP67
Lens	PC
Housing	PC,white
Package	inner box：120*55*120mm Carton：625*300*260mm ATY：50PCS

Size

35

$L=300^{+30}_{-15}$

Ø109