





WK-64




WK-64C2W-Spot



WK-64C2W-Spot-AL



WK-64

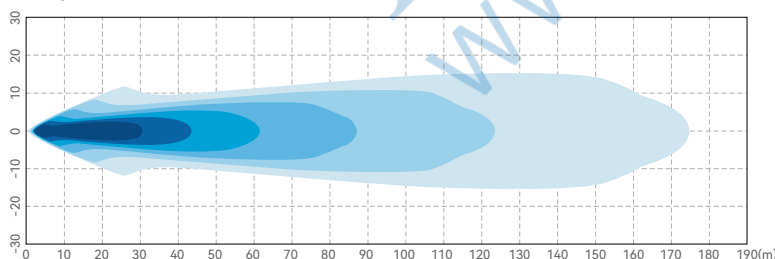

Beam pattern: Spot
Illuminance (LUX)



Part NO.	FUNCTION	VOLTAGE	POWER	LUMEN (±10%)	MATERIAL	MOUNTING	APPROVALS	CONNECTION	MECHANICAL PERFORMANCE
WK-64C2W-Spot	White Work Lamp	DC 10-30 V	LEDs: 8 PCS* 5 W	Raw: 3150 LM Effective: 2200 LM	Lens:PC Housing: High Thermal Conductivity Alloy Plastic	Plastic Bracket	EMC R10/ Customizable to other EMC levels	Cable/ DT04-2P	Vibration: RMS=5.79 G 10~2000 Hz Mechanical shock: 30 G
WK-64C2W-Spot-AL					Lens: PC Housing: ADC 12	Metal Bracket			