


HDL0048




RIGHT LAMP



LEFT LAMP

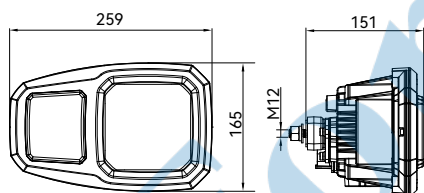

HORIZONTAL MOUNTING

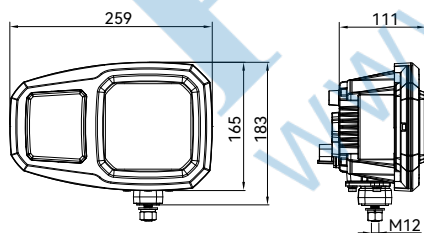

VERTICAL MOUNTING



Head Lamp

FUNCTION	POWER (12 V)	POWER (24 V)	LUMEN	LEDs	MATERIAL	MOUNTING	CONNECTION	APPROVALS	MECHANICAL PERFORMANCE
High Beam	17.2 W	17.4 W	1100 LM	1 PCS	Housing: ADC12 Heated Lens: Glass Non-Heated Lens: PC	Bolt	DT04-6P/ 500 MM CABLE	DOT/ ECE R148/ ECE R149/ EMC R10/ CISPR25 Class 3 (Heated)/ CISPR25 Class 5 (Non-Heated)	Random Vibration: RMS=3.18 G 10~2000 Hz Swept Vibration: 5 G Mechanical shock: 50 G
Low Beam	17.2 W	17.4 W	1100 LM	1 PCS					
Front Position	2.6 W	3 W	—	12 PCS					
Direction Indicator	6.2 W (ECE)	7 W (ECE)	—	12 PCS+8 PCS					
Heated Lens (Optional)	—	—	—	—					




HDL0048



DOT/ECE

Beam pattern:High beam


Illuminance (LUX)

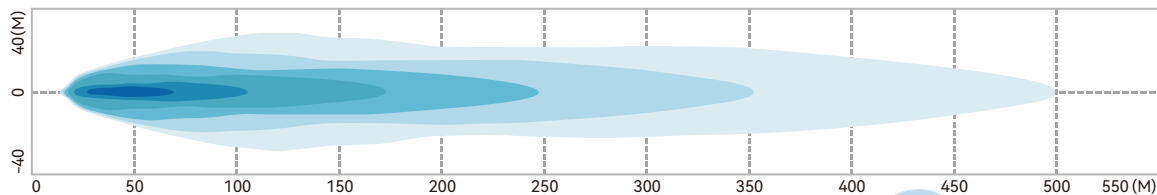

ECE RHT

Beam pattern:Low beam


Illuminance (LUX)

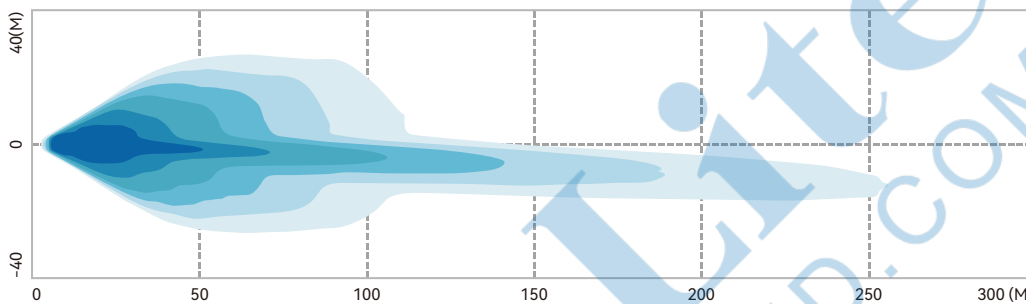

DOT

Beam pattern:Low beam

Illuminance (LUX)

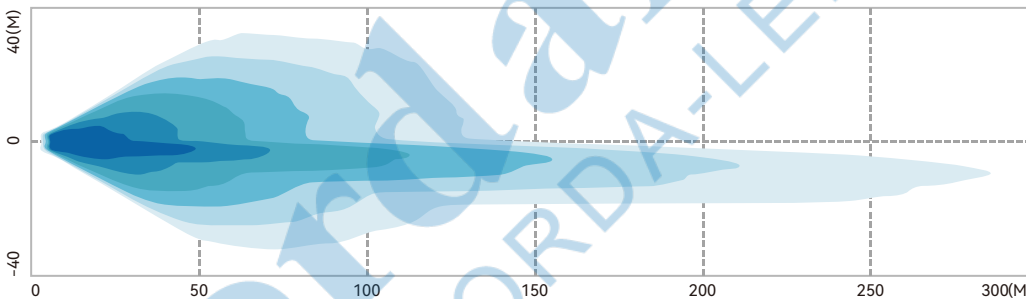

Head Lamp

