


HDL0048



右前照灯



左前照灯

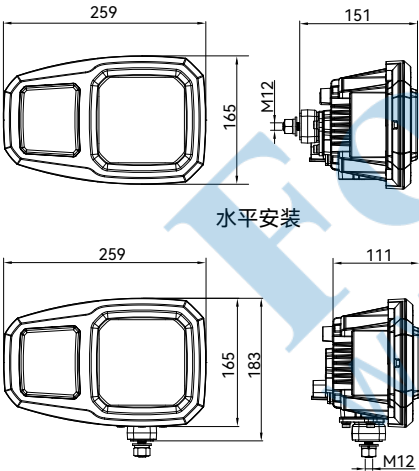

水平安装

垂直安装



前照灯

功能	功率 (12 V)	功率 (24 V)	流明	LEDs	材料	安装方式	连接方式	认证	机械性能
远光	17.2 W	17.4 W	1100 LM	1 PCS	灯体: ADC12 加热面罩: 玻璃 非加热面罩: PC	螺栓安装	DT04-6P 接插件/ 500 MM 电缆线	DOT/ ECE R148/ ECE R149/ EMC R10/ CISPR25 Class 3 (加热版本) / CISPR25 Class 5 (非加热版本)	随机振动: 有效加速度 RMS=3.18 G 10~2000 Hz 扫频振动: 有效加速度 5 G 机械冲击: 加速度 50 G
近光	17.2 W	17.4 W	1100 LM	1 PCS					
前位置	2.6 W	3 W	—	12 PCS					
转向	6.2 W (ECE)	7 W (ECE)	—	12 PCS+8 PCS					
加热面罩 (可选配)	—	—	—	—					

HDL0048

