



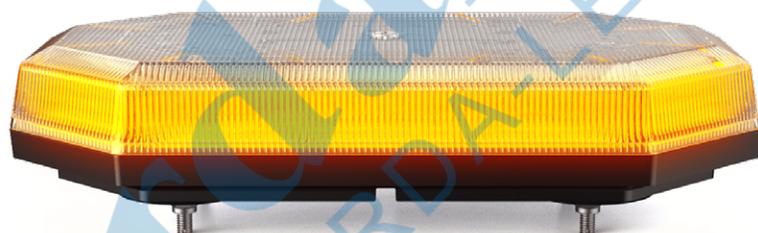

WA-104 SERIES

FEATURES

- More connections available in cable, wireless remote control box, to meet customer needs in different occasions.
- Convenient installation options, such as magnetic installation, screw installation, to meet the needs of customers in different occasions.
- Budget-friendly, economical and affordable, while meeting the needs of customers, it reduces the product investment budget.

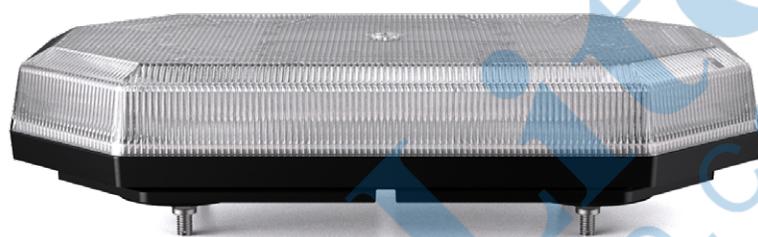

Amber Warning Lamp



Amber / White Warning Lamp




OPTIONAL: CB-005 Wireless Control Box

Part NO.	Voltage	Function	LED	Power	Material	Mounting	Connection	Approvals
WA-104C2A-001	DC 10-30 V	Amber Warning Lamp	80 PCS	50 W	Lens:PC Housing:ABS	Magnet	2500 mm Cigar Plug	ECE R65 Class 2 CISPR 25 Class 3 EMC R10
WA-104C2A-003						Bolt	500 mm Cable	
WA-104C2A-006			Magnet	2500 mm Cigar Plug		ECE R65 Class 1 SAE J845 Class 1 CA Title 13 CISPR 25 Class 3 EMC R10		
WA-104C2A-008			Bolt	500 mm Cable				
WA-104C2AW-001		Amber / White Warning Lamp	56 PCS	58 W		Magnet	2500 mm Cigar Plug	SAE J845 Class 1 CISPR 25 Class 3 EMC R10
WA-104C2AW-003						Bolt	500 mm Cable	

Warning Lamp

WA-104 SERIES

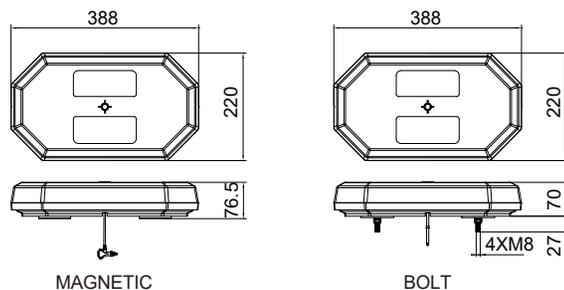

Amber Flash Pattern (ECE R65 Class 2)

# 1	Single Flash(ECE, By Day): 480 ms	# 6	Triple (Middle)+ Triple (Two Ends): 2100 ms
# 2	Single Flash(ECE, By Night): 480 ms	# 7	Triple (Left& Right) Half: 1400 ms
# 3	Double Flash: 480 ms	# 8	Clockwise Rotation: 840 ms
# 4	Quint Flash: 480 ms	# 9	Triple (Middle)+ Triple (Two Ends)+ Triple (Full): 2700 ms
# 5	Single Flash: 800 ms	# 10	Cruise

Amber Flash Pattern (SAE J845 Class 1 / ECE R65 Class 1)

# 1	Single Flash(ECE): 480 ms	# 6	Triple (Middle)+ Triple (Two Ends): 2100 ms
# 2	Single Flash(SAE, CA T13): 800 ms	# 7	Triple (Left& Right) Half: 1400 ms
# 3	Double Flash: 480 ms	# 8	Clockwise Rotation: 840 ms
# 4	Triple Flash: 480 ms	# 9	Triple (Middle)+ Triple (Two Ends)+ Triple (Full): 2700 ms
# 5	Quint Flash: 480 ms	# 10	Cruise

Amber / White Flash Pattern (SAE J845 Class 1)

# 1	Single Flash: 480 ms	# 6	Single (Left& Right) Half: 800 ms
# 2	Double Flash: 480 ms	# 7	Triple (Left& Right) Half: 1400 ms
# 3	Single Flash: 800 ms	# 8	Quint (Left& Right) Half: 480 ms
# 4	Clockwise Rotation: 840 ms	# 9	Single (Left& Right) Half + Quint (Left& Right) Half: 1440 ms
# 5	Single (Left& Right) Half: 480 ms	# 10	Cruise